


## 8 Fully Programmable Dry Contact Inputs and Relay Outputs

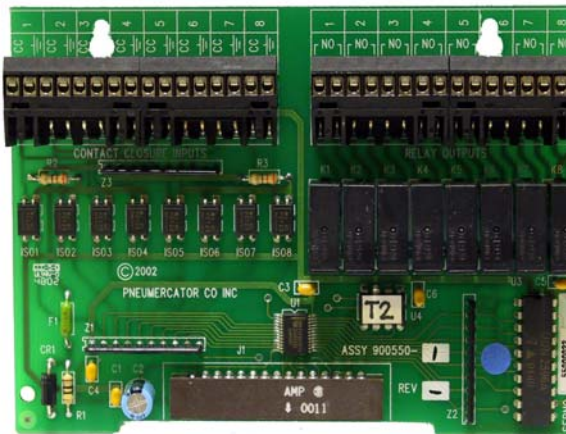

### Product Description

The TMS series 8 Input/8 Relay Output Card is a field upgradeable plug-in option for both the TMS2000 and TMS3000 Tank Management Systems that provides eight (8) dry contact inputs and eight (8) 1 Form A relay contact outputs. All I/O channels are uncommitted and fully programmable via the console front panel or any of the available communications interfaces. Each input is optically isolated and programmable for relay control and alarm functions as well as remote relay acknowledgement or gating functions. Inputs may also be programmed to monitor submersible pump or generator activity in conjunction with the TMS Series AUTO LEAK TEST mode. Each relay output is programmable to trigger on any combination of events, including in-tank leak, theft, product or water setpoints, leak or point level sensor alarm, contact closure input or system error. Additionally, relays are individually programmable for failsafe mode; delayed shutoff mode and a latching mode for pump up/down functions. Typical relay applications include remote annunciation, pump and siphon break/flow control valve operation, and other user-defined switch closure functions. These relays provide a simple and straightforward interface to most programmable logic controllers, building management systems, and similar input monitoring devices. All input/output connections are provided via plug-in terminal blocks for ease of wiring and board replacement.

### Applications

- Remote Annunciators: Overfill, High, Low, Leak
- Pump Up/Down using latching relay mode
- Siphon Break/Flow Control Valves
- TMS AUTO LEAK TEST
- Backup Generator Run Monitoring
- Pump Fail Status
- BMS/PLC Interface
- User-defined Switch Closure Inputs

### Specifications

- Input Type: Dry Contact, Optically-Isolated, Programmable
- Output Type: Relay, Dry Contact, Programmable, UL/CSA listed
- Relay Contacts: 1 Form A, Rated 5A @120, 5A @240 VAC
- Maximum Wire Gauge: 18 AWG, stranded
- Input Modes: Alarm, Relay, Gate, Acknowledge, Combinatorial, Delayed
- Output Triggers: Site-specific alarms: Theft, System Errors, System Power Failure  
Tank Alarms: In-tank Leak, Product and Water Setpoints  
Leak/Point Level Sensor Alarms  
Contact Closure Inputs  
Note: Each trigger event can control up to three (3) separate relays
- Output Modes: Failsafe/1 Form B, Latching, Delayed Shutoff, Front Panel Acknowledge
- System Requirements: One (1) Non-hazardous I/O Expansion Slot

### Model Numbers

- 900550-1 TMS3000
- 900551-1 TMS2000

Note: Specifications subject to change w/o notice. 6-28-2004



Pneumercator Company, Inc.  
120 Finn Court  
Farmingdale, New York 11735

Tel: 631-293-8450  
Fax: 631-293-8533  
<http://www.pneumercator.com>