


Wireless, Battery-Powered, Tank Gauging Module including 4 Sensor Inputs for EPA-Compliant Secondary Containment Leak Detection

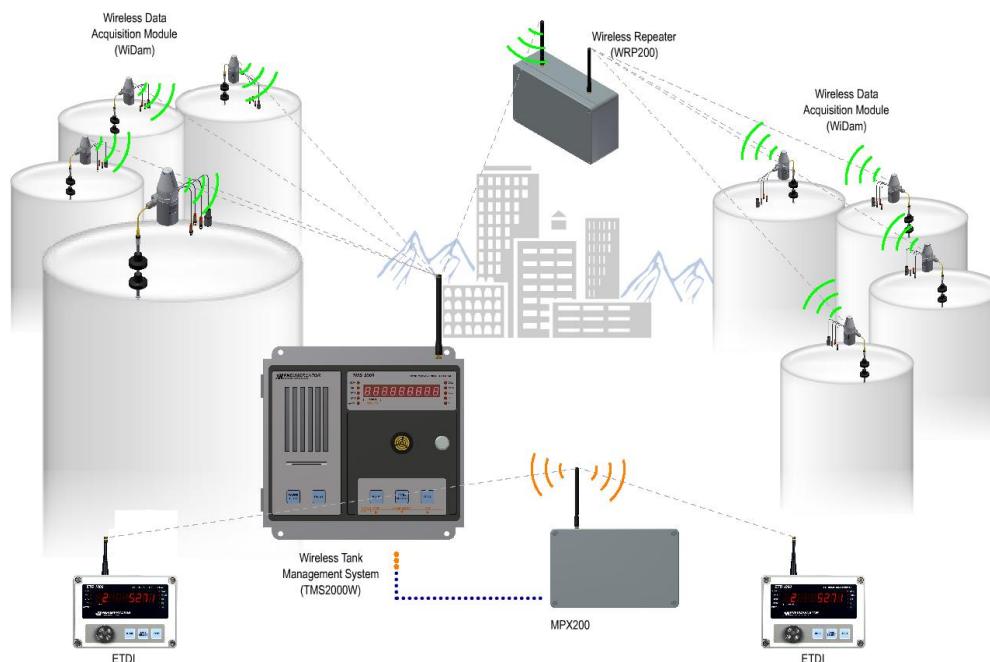


Product Description

The WiDAM Wireless Data Acquisition Module provides accurate and reliable magnetostrictive tank gauging and secondary containment leak detection for above and below-ground liquid storage tanks without the high cost of running wiring conduits between the tanks, sensors and the monitoring TMS console. Instead, the WiDAM transmits data wirelessly using a high reliability, frequency hopping spread spectrum (FHSS) radio that is extremely tolerant of background electrical noise present in most industrial environments. The WiDAM is self-contained, including ultra-low power microprocessor, radio transceiver, antenna and long-life lithium battery module, all housed in a NEMA 4X weatherproof and corrosionproof enclosure suitable for installation within a hazardous-classified area. Safety interlock feature allows battery replacement without removing WiDAM from the hazardous location. Several mounting bracket kits are available for AST and UST installations.

Specifications

- Radio: 902-928Mhz FHSS, 2.4Ghz optional
- Probe / Sensor Capacities: 1 Magnetostrictive Probe for Product and Water Level, Product Temperature
4 Leak or Point-Level Sensors (maximum 3 discriminating), Supervised Wiring Ready
- Compatible Systems: TMS2000W console, 12 to 32 tank, 48 to 128 sensor capacity
- Power Requirements: Pneumercator Ultra-High Capacity Lithium Battery Pack P/N 900621-1-4
w/Safety Interlock
- Battery Life: Up to 4 years, depending on update rate and power save mode. Continuous battery status reported to TMS.
- Construction: Epoxy Powder Coat Aluminum Alloy Housing, HDPE Cover
- Dimensions: 12.4" H x 4.5"Dia (5.5" W across hubs)
- Weight: 6 lbs (w/Battery Pack)
- Location Approval: UL Class I, Div 1, Groups C and D; cUL Class I, Zone 0, Group IIB
- Operating Temperature: -40° to +160° F (-40° to +70 C)
- Enclosure Rating: NEMA 4X, UV-rated
- Conduit/Hub Connections: 2 x 3/4" Female NPT
- Supplied Hubs: Two Non-Metallic, 3/4" Compression Hubs
Probe: Single Cable Entry
Sensors: Four Cable Entries

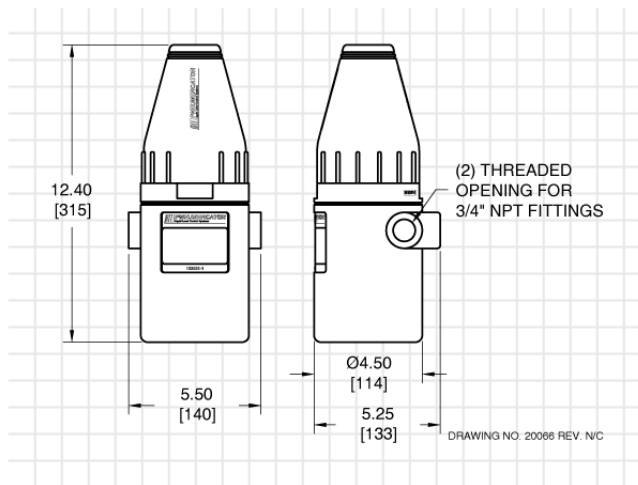

Probe

- Technology: Magnetostrictive, Dual Float, w/ reflection resolution doubling
- Accuracy (Minimum):

MP55xS:	MP56x:
Product Level: 0.0005"	Product Level: 0.01"
Water Level: 0.001"	Water Level: 0.01"
Temperature: 0.1° F	Temperature: 0.1° F
- Materials: Shaft: 316 SS or Kynar
Floats: Urethane, 316 SS, Buna-N, or Kynar
- Mounting: Inventory Only: 2" minimum riser (4" preferred) or direct bushing / flange mount
- Temperature Sensing: Single sensor standard. Five sensor array available
- Location Approval: UL Class I, Div 1, Groups C and D; cUL Class I, Zone 0, Group IIB
- Operating Temperature: -40° to +175°F (-40° to +80° C)
- Operating Pressure: 150 PSIG 316SS, 50 PSIG Kynar
- Field Wiring: 22AWG, 3-Conductor w/ shield and drain wire
Belden 6501FE or equiv., maximum length 50'
- Models: MP55xS Series rigid SS max. length 24', MP56x Series flex. Kynar max. length 70'

Sensors

- ES825-400FL Electronic, Discriminating - Containment, Manway and Piping Sumps, Dispenser Pan, Dry Annular
- ES825-300FL Electronic, Non-Discriminating - Containment, Manway and Piping Sumps, Dispenser Pan, Dry Annular
- LS600-LD Float, Containment, Manway and Piping Sumps, Dispenser Pan
- LS600xx Multi-Float, High / Low Level and Pump Control
- RSU800 Float, Wet Annular / Reservoir
- LS610 Float, Dry Annular
- HS100-ND Polymer – Dry Containment, 1' or 2' length

Most sensors are available with Fault-Detect Supervised sensor and wiring option. Add "FL" Suffix to Model Number

Note: Specifications subject to change without notice. 10-20-2010



Pneumercator Company, Inc.
120 Finn Court
Farmingdale, New York 11735

Tel: 631-293-8450
Fax: 631-293-8533
<http://www.pneumercator.com>