


Secondary Containment Leak Sensor

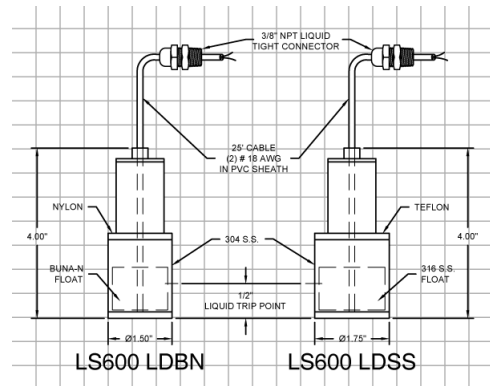

Product Description

The LS600-LD float-actuated leak sensor provides secondary containment leak detection for above ground and underground storage tank applications. The sensor assembly may be suspended at the desired point of actuation via the sensor cable and compression fitting, or allowed to rest at the bottom of the containment area being monitored. The compact size and favorable displacement properties of the LS600-LD make it ideal for monitoring shallow liquid levels. The LS600-LD Leak Switch is available with a Buna N or stainless steel float for monitoring in most petrochemical and chemical storage tank applications. The LS600-LD optionally supports Pneumercator’s FAULT-DETECT supervised wiring technology, which automatically detects field wiring faults when connected with a TMS series controller.

Applications

- Containment, Manway and Piping Sumps
- Dispenser Pan
- Turbine Enclosure
- Double-Wall Steel Tank

Specifications

- Technology: Magnetic Float, Hermetically Sealed Reed Switch
- Wetted Materials: Float: Buna-N (BN, SN), 316SS (SS)
Housing: 316SS and Nylon, (316SS and Teflon for SS)
Stem: Brass, (316SS for SN, SS)
- Cable: 22AWG, 2-Conductor, 25’ Length, PVC-jacketed, (Teflon-jacketed for SS)
- Operating Temperature: -20° to +175°F (-30° to +80° C), -40° to +220°F (-40° to +100° C) for SS
- Pass-thru Opening Size: Minimum 1-1/2” NPT, (2” NPT for SS)
- Location Approval*: UL Class I, Div 1, Groups C and D; cUL Class I, Zone 0, Group IIB

Installation

Sensor may be suspended by its cable or placed on the containment or sump floor.

Certifications/Approvals

- UL/cUL Approved*, File #E139464
- Third-Party EPA Listed*

Ordering

- LS600-LDBN[-F,-FL] Buna-N Float, Brass Shaft, and PVC wiring
- LS600-LDSN[-F,-FL] Buna-N Float, 316 SS Shaft, and PVC wiring
- LS600-LDSS[-F,-FL] 316 SS Float, 316 SS Shaft, and Teflon wiring

[-F] denotes Fault-Detect Option for TMS2000/3000
[-FL] denotes Fault Detect Option for TMS2000W/WiDAM

*When used in conjunction with the TMS series controllers or TMS2000W series WiDAM Wireless Data Acquisition Module

Note: Specifications subject to change without notice. 07-06-2009



Pneumercator Company, Inc.
120 Finn Court
Farmingdale, New York 11735

Tel: 631-293-8450
Fax: 631-293-8533
<http://www.pneumercator.com>