


APPLICATION		REVISIONS			
NEXT ASSY	USED ON	REV	DESCRIPTION	DATE	APPROVED

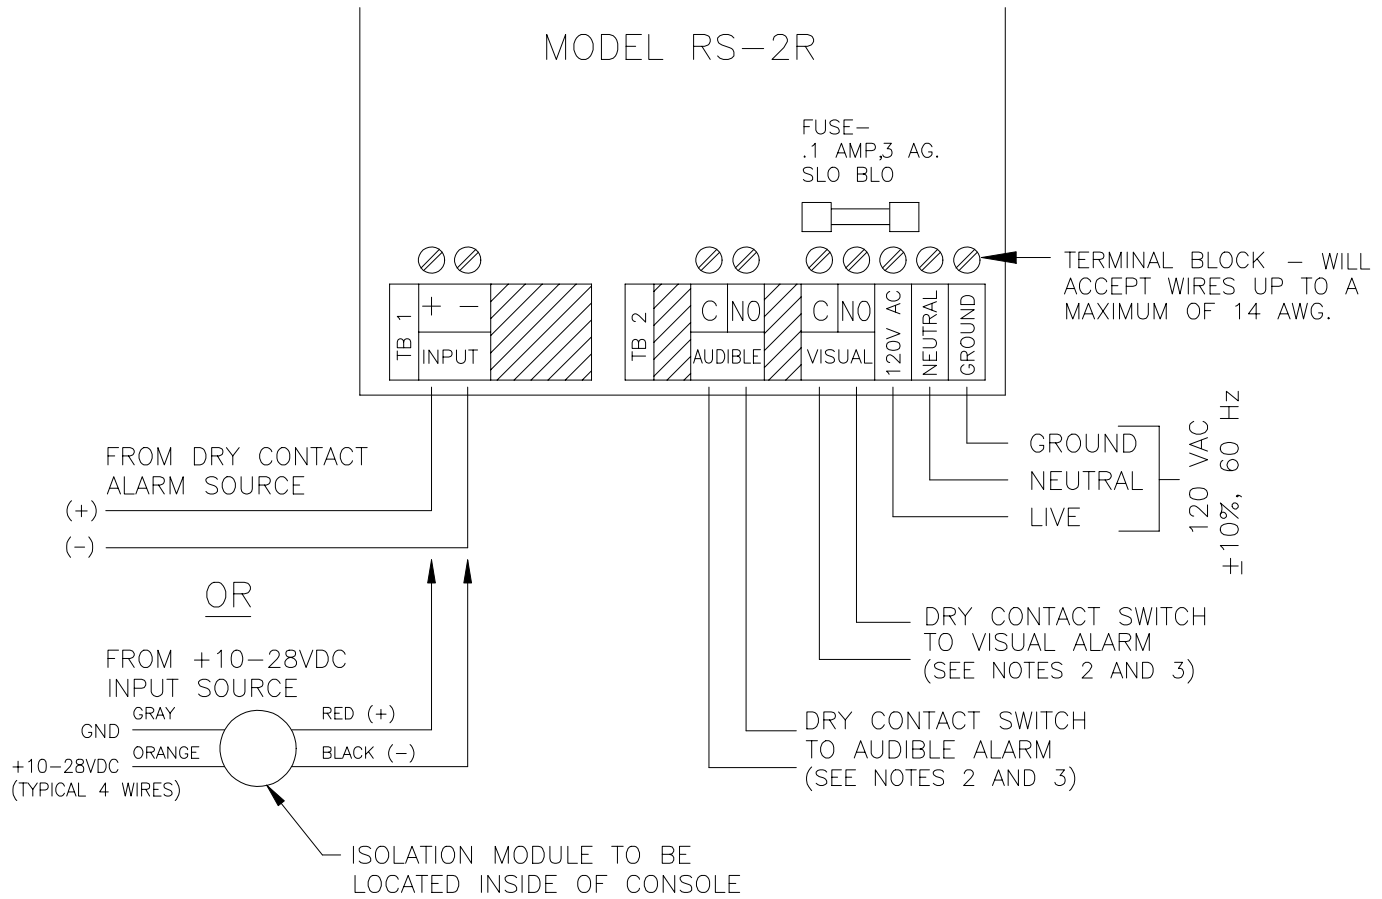

**NOTES:**

1. INPUT WIRING: USE STANDARD 2 CONDUCTOR 18 AWG UP TO 5000 FEET.
2. DRY CONTACT SWITCH OUTPUT: WIRE TO COMMON AND NORMALLY OPEN. OUTPUT RATED 3 AMPS AT 120 VAC.
3. DURING AN ALARM CONDITION, RESETTING THE UNIT WILL DISENGAGE THE THE AUDIBLE ALARM CONTACTS. THE VISUAL ALARM CONTACTS WILL DISENGAGE ONLY WHEN ALARM CONDITION IS RESOLVED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
±	.XX±.01	±0° 30'
	.XXX±.005	

MATERIAL  
SEE NOTES

FINISH  
SEE NOTES

APPROVALS	DATE
DRAWN R. KHARE	111397
CHECKED	
ISSUED	
DO NOT SCALE DRAWING	

**PNEUMERCATOR COMPANY**  
120 FINN COURT FARMINGDALE, N.Y. 11735

**WIRING DIAGRAM, MODEL RS-2R**

SIZE A	CAGE CODE 47876	DWG. NO. 50261	REV. —
-----------	--------------------	-------------------	-----------