

LS600W WORKSHEET

(Use This Worksheet to Generate Custom Configurations)

Select ONE of EACH of the following options: (Factory default shown in bold, consult factory for Other options)


Float
Stainless Steel Only

Stem
 Brass
 Stainless Steel

Housing
 Yes
 No

Mounting
 2" MS Bushing
 2" S/S Bushing
 2" S/S 150# Flange
 4" S/S 150# Flange
 Other Bushing

 Other Flange

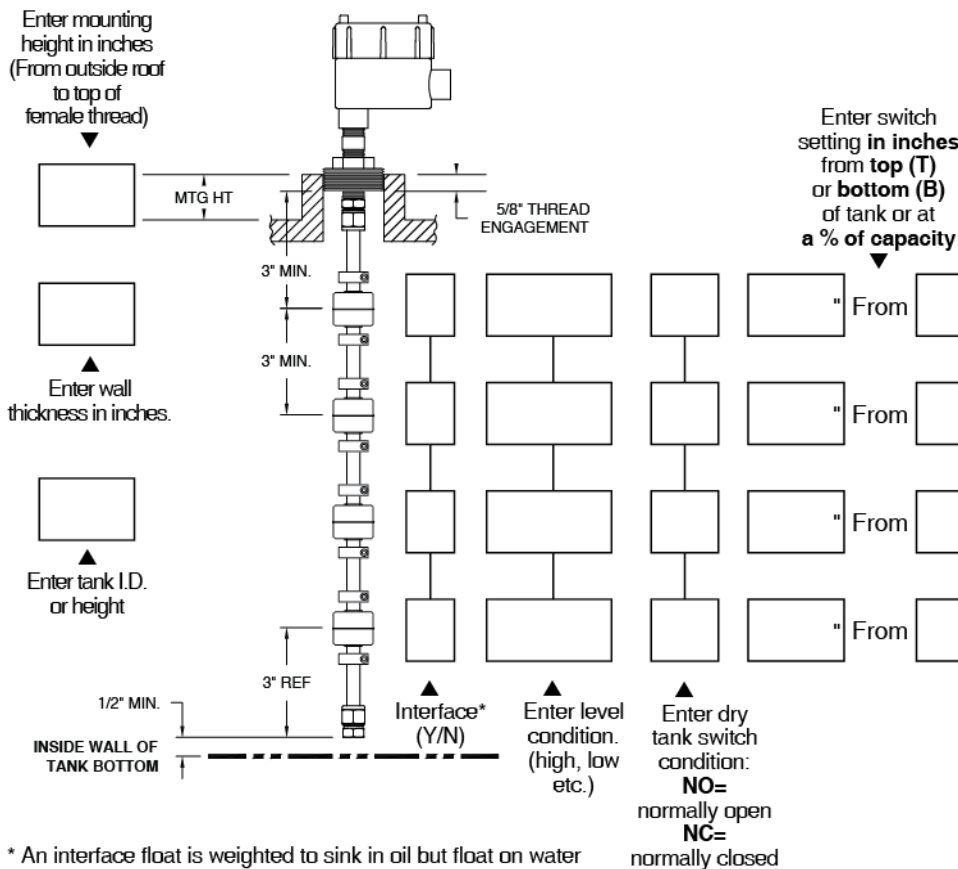

* An interface float is weighted to sink in oil but float on water

NOTE

Unless otherwise specified, the contact state in a dry tank is set as follows:

All Interface Floats: Normally Closed

Non-Interface Floats:

Overflow, H. High, and High: Normally Open

L. Low and Low: Normally Closed

Additional Tank Information: (Required where setting is given as a percent of volume)

Actual Capacity: _____

End Type (Horizontal cylinders only) (Flat, Dished, Spherical, etc.): _____

Manufacturer: _____