

LS600M WORKSHEET

(Use This Worksheet to Generate Custom Configurations)

Select ONE of EACH option below:
(Factory default shown in bold,
consult factory for Other options)

Float

- Buna-N**
- Stainless Steel (> .85 SG)
- Polypropylene

Stem

Stainless Steel Only

Wiring Termination (Optional)


- Housing**
- Quick Disconnect
- Flex Conduit Fitting

Special Features (Optional)

- Riser Spacer Mount
- Adjustable
(Bushing/Flange Mount Only)

Mounting

- None
- 2" MS Bushing**
- 1.5" MS Bushing
- 1.25" MS Bushing
- 1" MS Bushing
- 2" S/S Bushing
- 1.5" S/S Bushing
- 1.25" S/S Bushing
- 1" S/S Bushing
- 2" Aluminum Quick Release Cap
- 2" S/S 150# Flange
- Other Bushing/Flange

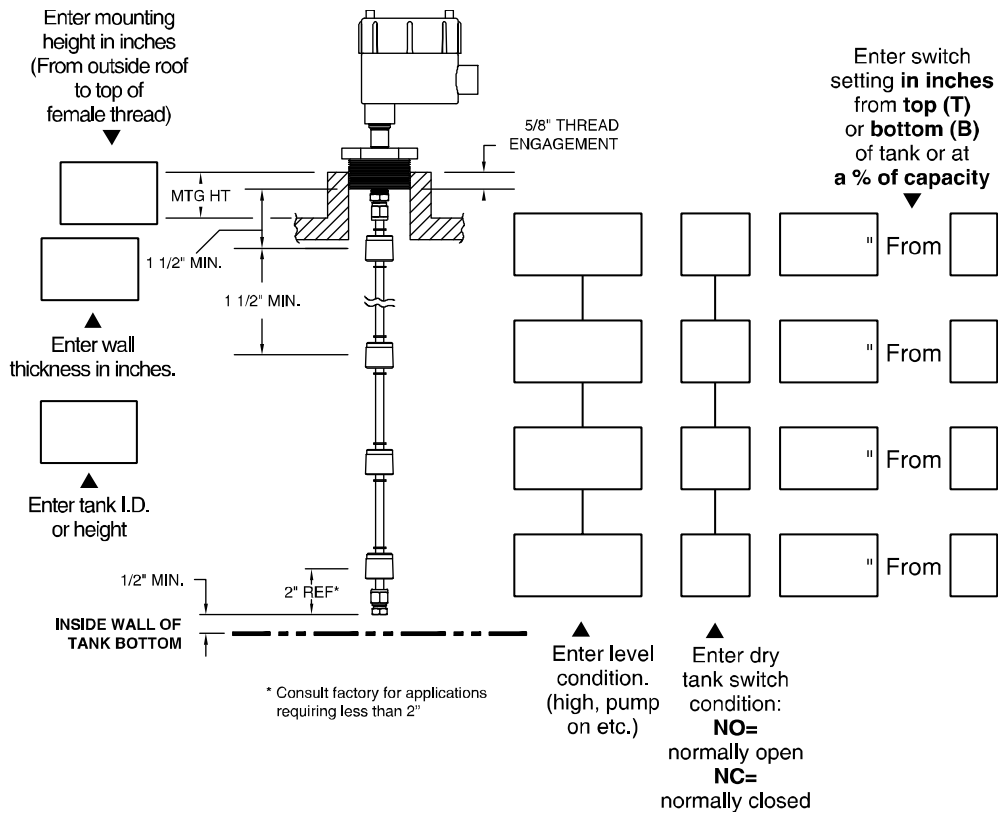

Additional Tank Information: (Required where setting is given as a percent of volume)

Actual Capacity: _____

End Type (Horizontal cylinders only) (Flat, Dished, Spherical, etc.): _____

Manufacturer: _____