
2" (51 mm) Riser Mounting Kit for MP45xS/MP55xS Magnetostrictive Tank Gauging Probes

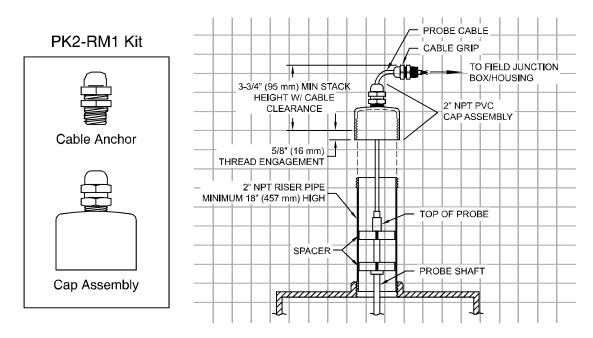

Product Description

The PK2-RM Riser Mount Probe Kit provides a "soft-mount" method of installation by allowing the probe to rest on the tank bottom and be stabilized within the tank riser without attachment. This method may be used for MP45xS/MP55xS series probe lengths up to 15 feet (4.6 m), providing easy installation and servicing by simply removing cap and lowering or raising probe by its cable. The standard kit includes a 2" PVC cap assembly with integral cable compression fitting, and cable compression fitting for field junction box.

IMPORTANT: Use PK2-DM Direct Mount Kit for probe lengths exceeding 15 feet (4.6 m). The riser mount should **not** be used in chemical or high heat applications without consulting factory.

Applications

- Vertical Storage Tanks up to 15 Feet (4.6 m)
- Underground Storage Tanks

Sub-Base Tanks

Specifications

• Materials: Cap: PVC, Aluminum, 304SS, or Bronze

Bushing: 316SS

Cable Compression Fitting: Nylon or PVDF Body, TPE or Teflon Rings

• Mount: 2" NPT riser pipe, minimum 18" (457 mm) height.

• Operating Pressure: 70 PSIG (483 kPa)

Model Numbers

	PK2-RM1 (or RM)	Schedule 80 PVC Cap, Nylon Cable Compression Fitting, TPE Rings (Stock, Standard)
-	,	
•	PK2-RM2	316SS Bushing, PVDF Cable Compression Fitting, Viton Rings (Special Order)
•	PK2-RM3	316SS Bushing, Nylon Cable Compression Fitting, TPE Rings (Special Order)
•	PK2-RM4	Quick Release Lockable Cap w/ Alum. Ferrule Adapt. (for use with float diameters 1.75" or less) (Special Order)
•	PK2-RM5	Aluminum Cap, Nylon Cable Compression Fitting, TPE Rings (Special Order)
•	PK2-RM6	304SS Cap, Nylon Cable Compression Fitting, TPE Rings (Special Order)
•	PK2-RM7	Bronze Cap, Nylon Cable Compression Fitting, TPE Rings (Stock)



Note: Specifications subject to change without notice. 12-09-2020