

LS600W WORKSHEET

(Use This Worksheet to Generate Custom Configurations)

Select ONE of EACH option below:
(Factory default shown in bold, consult factory for Other options)


Float
Stainless Steel Only

Stem
<input type="checkbox"/> Brass <input type="checkbox"/> Stainless Steel

Wiring Termination (Optional)
<input type="checkbox"/> Housing <input type="checkbox"/> Quick Disconnect <input type="checkbox"/> Flex Conduit Fitting

Special Features (Optional)
<input type="checkbox"/> Riser Spacer Mount <input type="checkbox"/> Adjustable (Bushing/Flange Mount Only)

Mounting
<input type="checkbox"/> None <input type="checkbox"/> 2" MS Bushing <input type="checkbox"/> 2" S/S Bushing <input type="checkbox"/> 2" Aluminum Quick Release Cap <input type="checkbox"/> 2" S/S 150# Flange <input type="checkbox"/> 4" S/S 150# Flange <input type="checkbox"/> Other Bushing _____ <input type="checkbox"/> Other Flange _____

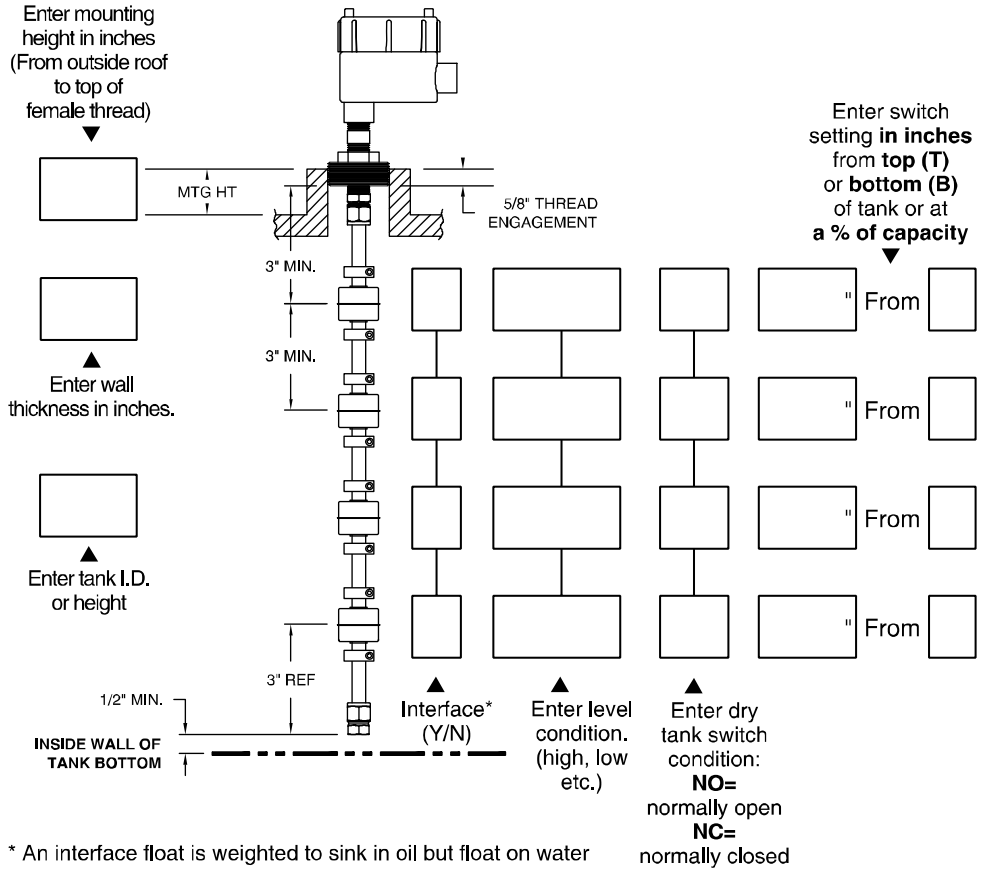

* An interface float is weighted to sink in oil but float on water

NOTE

Unless otherwise specified, the contact state in a dry tank is set as follows:

All Interface Floats: Normally Closed

Non-Interface Floats:

Overfill, H. High, and High: Normally Open

L. Low and Low: Normally Closed

Additional Tank Information: (Required where setting is given as a percent of volume)

Actual Capacity: _____

End Type (Horizontal cylinders only) (Flat, Dished, Spherical, etc.): _____

Manufacturer: _____